

DIAMOND POWER SPRAYER SERIES

鑽石牌 高壓動力噴霧機系列



鑽石

DIAM


TS-22



TS-28



TS-60

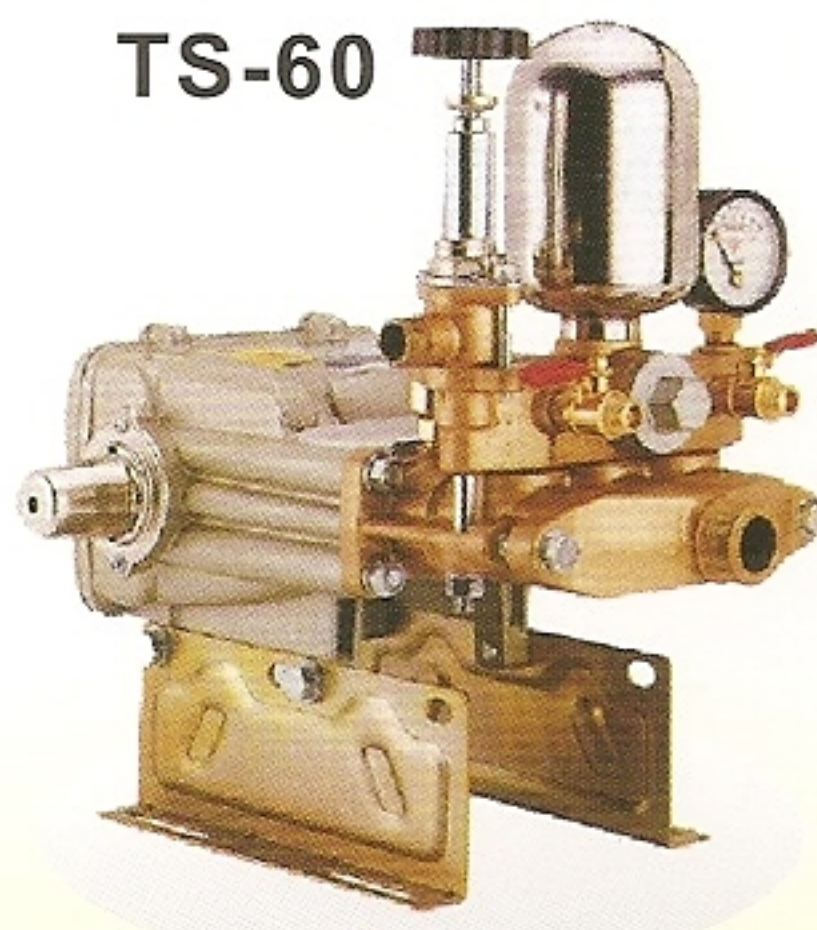

TS-100



TS-130




TS-240



TS-360



V-70

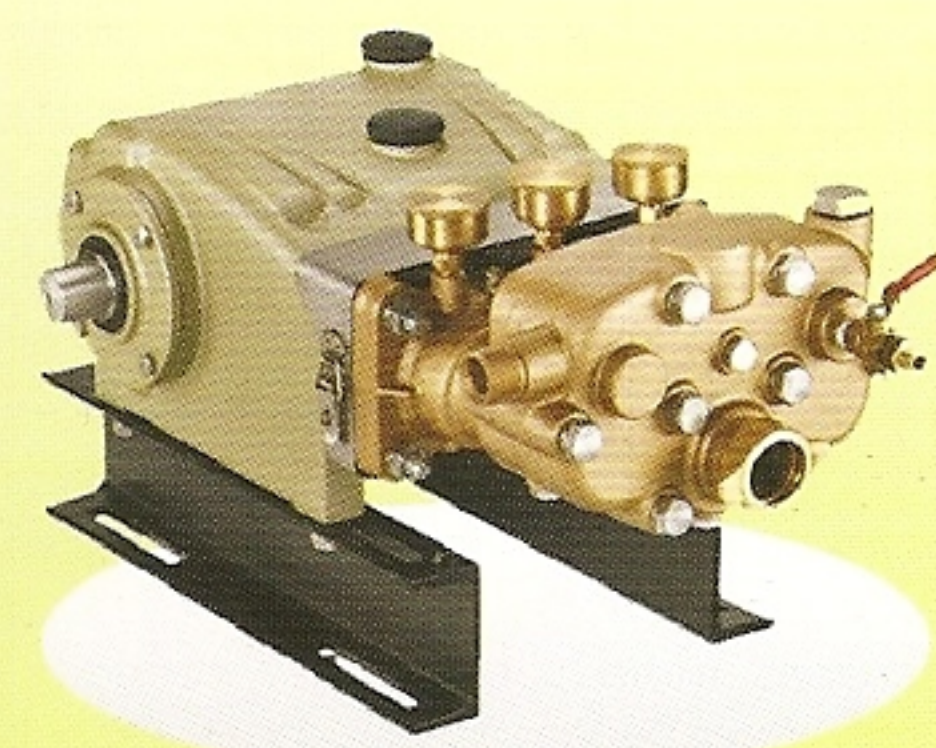

SPECIFICATIONS 規格表：

機型 MODEL	尺寸 L x W x H (mm)	重量 WEIGHT (kgs)	吸水量 SUCTION VOLUME				壓力 PRESSURE (kg/cm ²)		所需馬力 REQUIRED POWER	
			噴霧 SPRAYING		送水 IRRIGATION		噴霧 SPRAYING	送水 IRRIGATION	馬達 MOTOR (HP)	引擎 ENGINE (PS)
			RPM	L/min	RPM	L/min				
TS-22	340 x 270 x 310	9	800	14	1200	20	21~40	0~10	1	3.5~4
T-28	350 x 310 x 345	12	800	28	1200	40	21~40	0~10	1.5~2	5~6
TS-60	410 x 310 x 355	12	800	33	1000	41	21~40	0~10	1.5~3	5~6
TS-100	455 x 320 x 460	21	700	54	1000	75	21~40	0~10	3~5	7.5~9
TS-130	610 x 370 x 620	39	600	99	800	130	21~50	0~10	5~13	9~18
TS-240	710 x 460 x 700	77	600	185	750	230	21~50	0~10	7.5~25	19~23
TS-360	770 x 530 x 770	86.6	600	197	850	280	21~50	0~10	7.5~30	19~23
V-70	720 x 540 x 250	54	600	128	1000	210	21~50	0~10	7.5~20	9~19

FEATURES 特點：

1. Nodular graphite cast iron cylinder.
2. Copper cylinder for TS-240, TS-360, V-70, TS-240APA, TS-360APA.
3. Nitrided stainless steel plunger, chrome plated stainless steel plunger and ceramic plunger are available.
4. Aluminum alloy die casting crank case.
5. Packings are made of special acid & alkali proof and abrasion proof materials.

1. 球墨鑄鐵汽缸
2. 黃銅汽缸：TS-240, TS-360, V-70, TS-240APA, TS-360APA
3. 不鏽鋼氮化處理、鍍硬鉻、陶瓷柱塞可供選擇
4. 鋁合金壓鑄曲軸箱
2. 特殊耐藥、耐磨迫緊